

BOATYARD GUIDELINES & INFORMATION

Thank you for choosing Scarborough Marina for your boating repairs & maintenance. Carefully read the following guidelines. If you have any questions, please contact the Marina Office.

First time hauling out at Scarborough Marina: -

- Yachts over 12m in length & over 1.8m draft, may require towing into the travel lift backwards
- Please refer to predicted tides and ensure sufficient depth for your vessel (1.1m at zero tide)
- Once in the slings, any delays in lifting the vessel will be charged at an additional rate per 15 minutes
- Boarding ladders can be provided at no charge – Ladder Agreement to be signed
- Scaffolding to be arranged by vessel owner or contractor
- Car parking available on the opposite side of the street in the customer carpark
- All additional services listed below are available Monday to Friday – Charges apply

Tow Boat Service: -

- Subject to weather & tides. May be cancelled without notice
- Any boat needing to be hauled out backwards MUST be towed in & out of the travel lift bay

Preparing your Vessel to be hauled out: -

- Submit a completed & signed Scarborough Marina Boatyard Works Order & Boatyard Terms & Conditions to the marina office to confirm your booking.
- Supply Insurance Certificate of Currency
- Please arrive 15 mins before your haul out or the lift may be cancelled without notice.

Relocation of Stands: -

- **DO NOT ADJUST OR MOVE ANY STANDS OR CRADLES SUPPORTING YOUR VESSEL UNDER ANY CIRCUMSTANCES**
- Only qualified Scarborough Marina Boatyard staff are permitted to adjust, or re-position stands and cradles
- This service is available at the discretion the Boatyard Supervisor during standard weekday operating hours only.


Engine Lifts: -

- Subject to availability and bookings are essential. Weekday operating hours only.

Relaunch: -

- You will have approximately 10 mins to paint patches once we have lifted your vessel off the stands.
- If you require additional time, enquire at the marina office.
- This is subject to availability and must be booked in advance.
- Antifoul requires at least 24 hours to dry before vessel can be lifted
- All haul out, hardstand and associated invoices are to be paid (cleared funds) prior to relaunch

SCARBOROUGH MARINA SITE PLAN

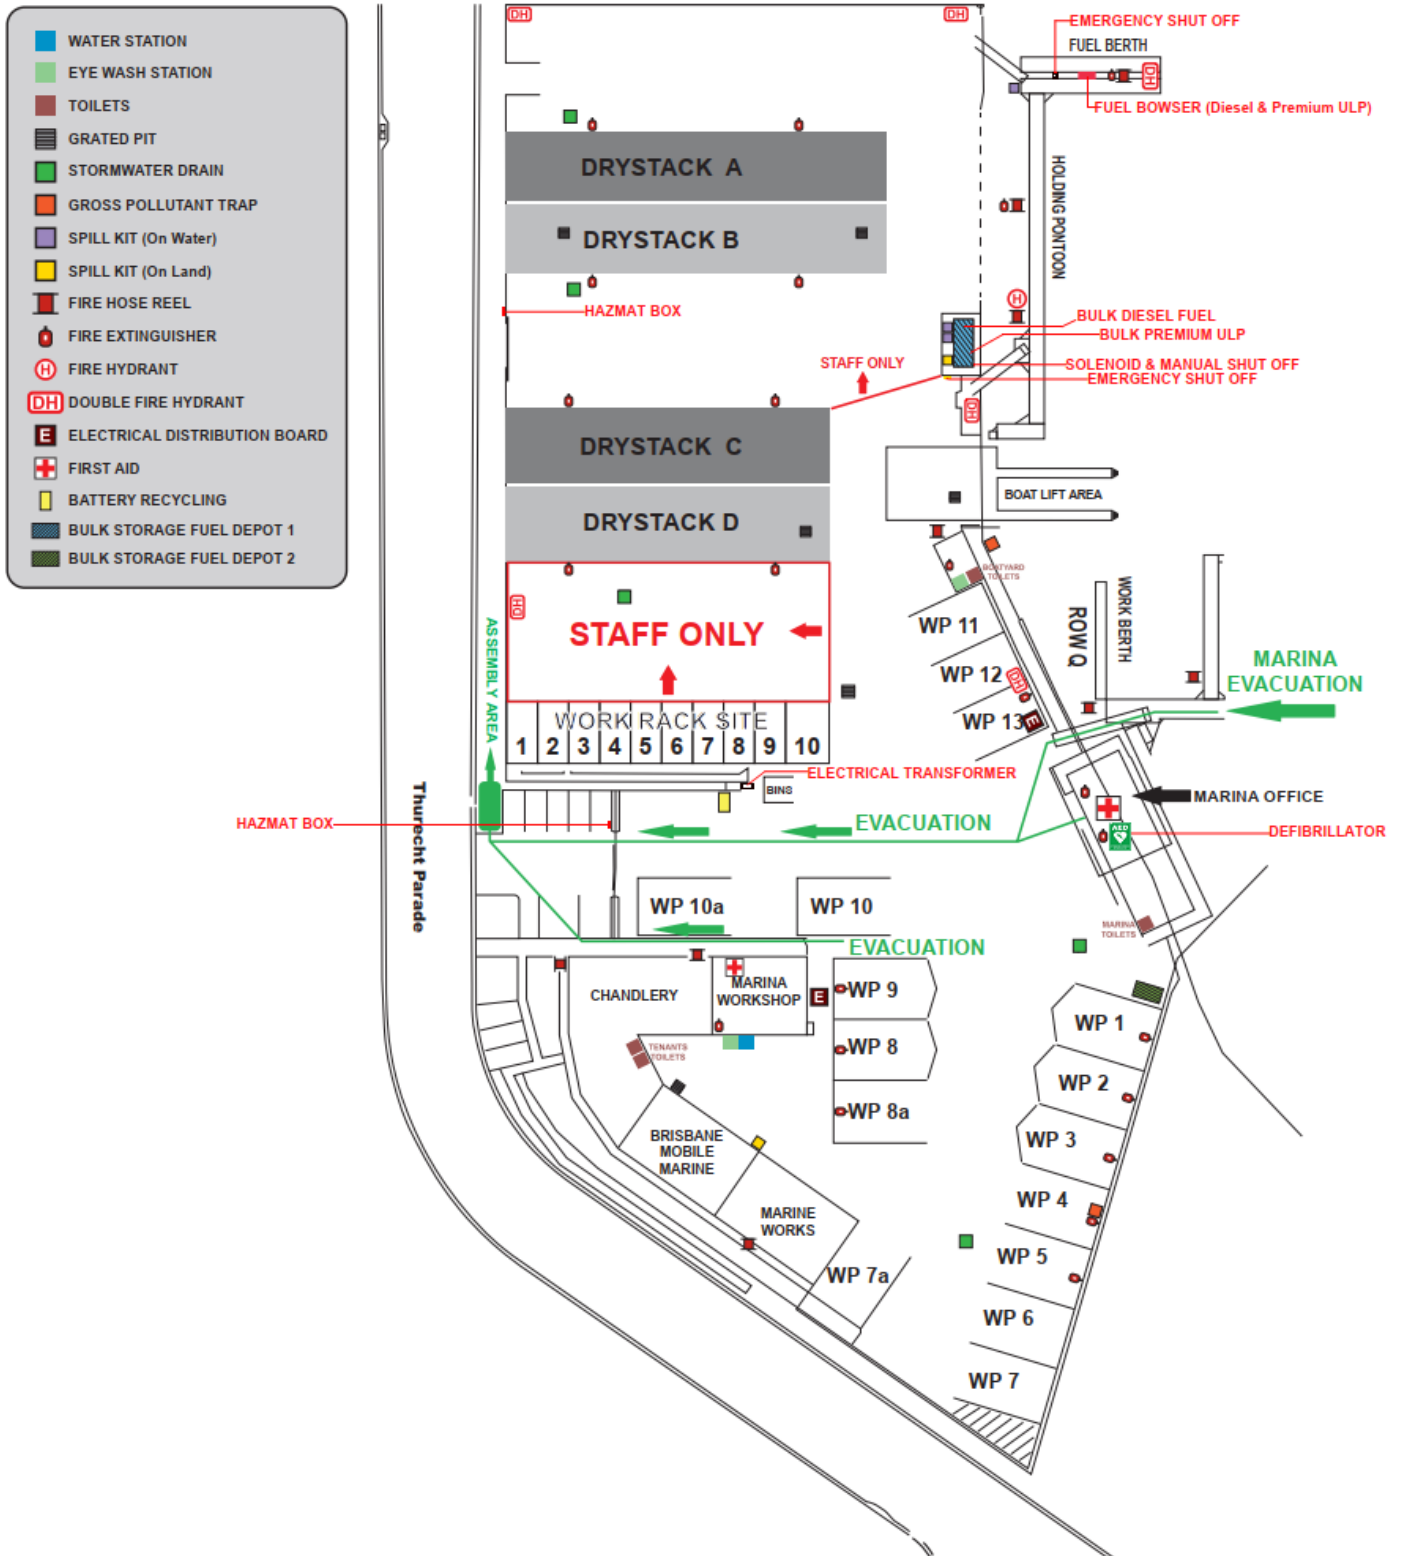

REVISED 15/01/2026